

# Fixed In-Line Attenuator for PM Fiber




- PER: >30 dB
- Spectrally Flat
- Return Loss >60 dB
- In-Fiber Fabrication
  - No Lenses
  - No Fusion Splice
- Available in all Polarization Maintaining Fibers

## Applications:

- Coherent Detection
- Power Conditioning
- Optical Amplifiers
- Fiber Lasers

**Spectral Dependence**

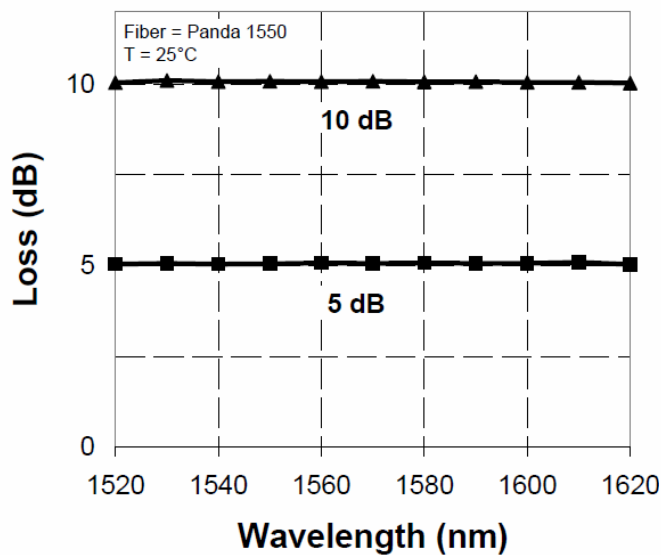

**Temperature Dependence**

